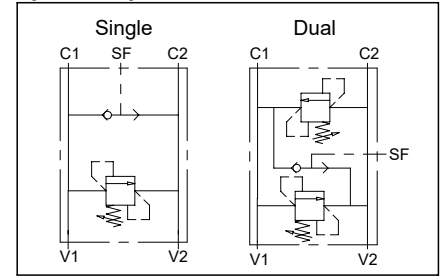
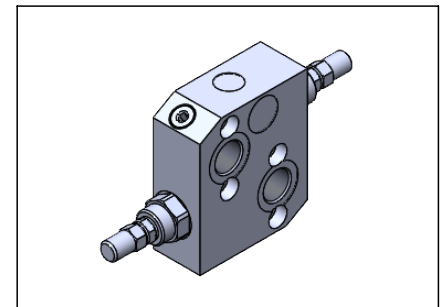
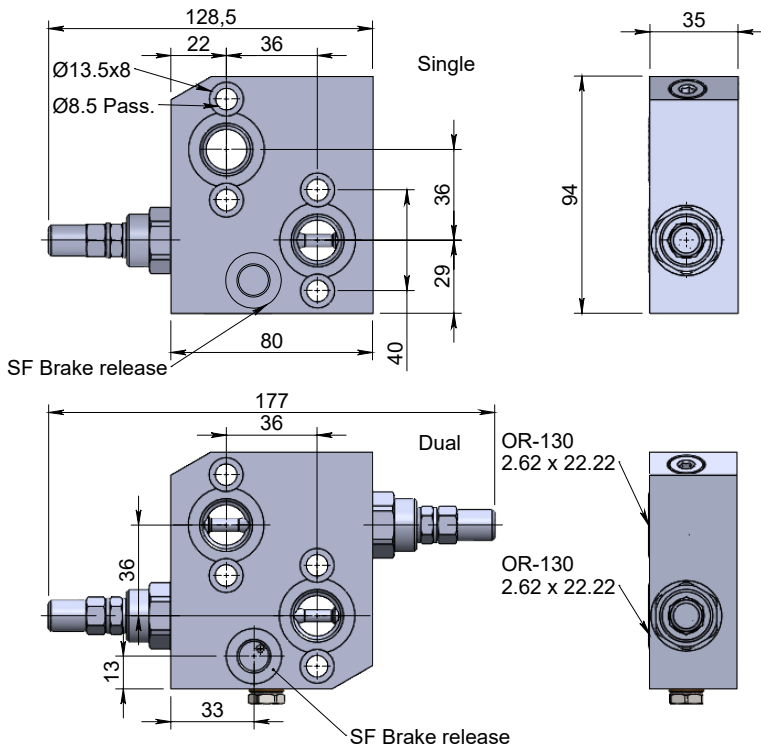
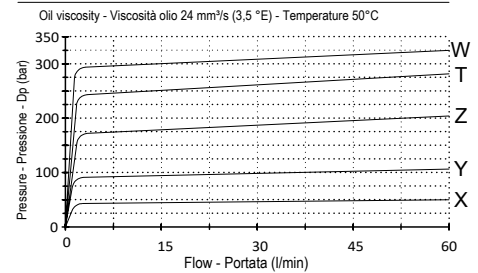


**Single / Dual cross over direct acting relief valve OMP OMR motor flangeable**  
**Valvola antiurto singola / doppia flangiabile su motori OMP OMR**

**Specifications / Specifiche**

Fluid viscosity:	Viscosità Fluido :	ISO 3448
Filtration:	Classe di contaminazione:	ISO 4406
Fluid temperature:	Temperatura fluido:	-20°C +90°C
Ambient temperature:	Temperatura ambiente:	-20°C +50°C
Max. operating pressure:	Pressione di lavoro max :	350 Bar
Standard seals:	Guarnizioni standard:	NBR 70 Shore A
Manifold material:	Materiale collettore:	Zinc plated steel

**Hydraulic symbol / Simbolo idraulico**

**Dimensions / Dimensioni (mm)**

**Performance / Prestazioni**

**How to order / Come ordinare**

**10-L-04-G\*\* -3-R-04-\***

03= Double effect  
 13= Double effect with brake release  
 06= Single effect  
 16= Single effect with brake release

R= Screw with steel cap (Std)  
 N= Tamper resistant cap  
 O= Handknob and locknut

04 = 1/2 BSPP

Manifold model  
 Modello collettore

Adjustment  
 Regolazione

Ports size  
 Dimensione attacchi

Std setting at 5 l/min

Setting range	X = 10-50 bar	30 bar
	Y = 20-100 bar	75 bar
Campo taratura	Z = 10-180 bar (Std)	90 bar
	T = 50-250 bar	130 bar
	W = 80-300 bar	150 bar

Standard code Codice standard	Thread/Filetto		Denomination	Weight/Peso (kg)	Max. Flow Q max (l/min)
	C1-C2	SF			
10L04G033R04Z	1/2	-	RVD-OMP-OMR-2	1.7	60
10L04G133R04Z	1/2	1/4	RVD-OMP-OMR-2-SF	1.7	60
10L04G063R04Z	1/2	-	RVD-OMP-OMR-1	1.8	60
10L04G163R04Z	1/2	1/4	RVD-OMP-OMR-1-SF	1.8	60

\*On request versions: Please, contact our customer service.

\*Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.