
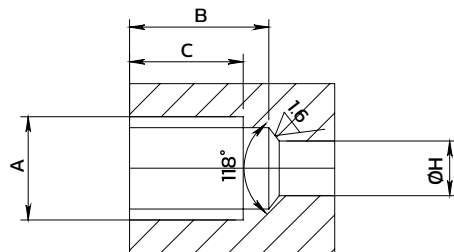
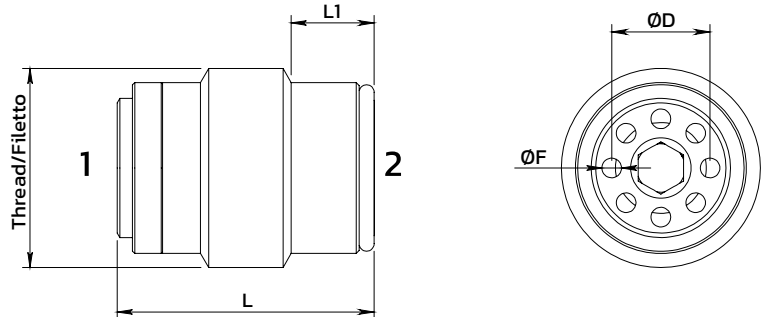


Check valve reversible insert, ball type

Valvola unidirezionale inserto reversibile, tipologia sfera




SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C

PERFORMANCE / PRESTAZIONI

Oil viscosity 24 mm²/s (35 °E) - Temperature 50°C

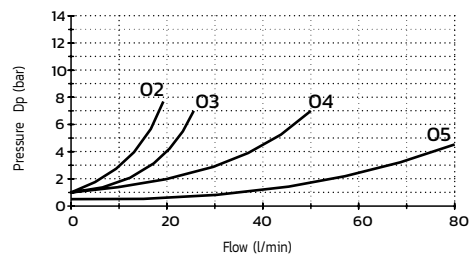

ORDERING CODE / CODICE ORDINAZIONE

13 C 00 D01 6 O ** O



Ports size	
O2	1/4 BSPP
O3	3/8 BSPP
O4	1/2 BSPP
O5	3/4 BSPP

Standard code	Thread	L	L1	ØF	ØD	A	B	C	ØH Max.	Weight kg	Max. Flow (l/m)	Cracking pressure	Max. Pressure (Bar)
13COOD0160020	1/4	17	5.5	1.3	6.5	1/4	31	28	7	0.01	20	0.5	350
13COOD0160030	3/8	18.5	5.5	2	8	3/8	34	31	9	0.018	30	0.5	350
13COOD0160040	1/2	22.5	7	2.5	10	1/2	38	35	12	0.035	50	0.5	350
13COOD0160050	3/4	28.5	7.5	3	14	3/4	45	41	16	0.07	80	0.5	350

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.