



## Adjustable needle bidirectional valve


### Strozzatore bidirezionale regolabile




O version:  
Knob adjustment

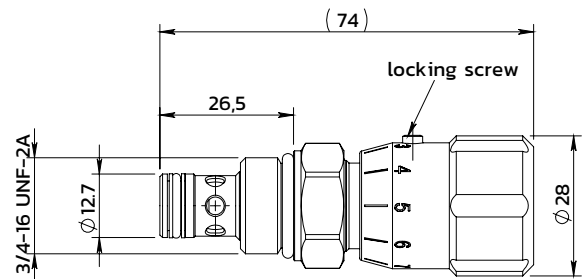

A ————— B



installation torque: 45/50 Nm.

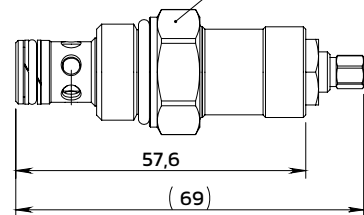


M version:  
screw adjustment

#### SPECIFICATIONS / SPECIFICHE

|                                                  |                  |
|--------------------------------------------------|------------------|
| Fluid viscosity / Viscosità fluido               | ISO 3448         |
| Filtration / Classe di contaminazione            | ISO 4406         |
| Fluid temperature / Temperatura fluido           | -20°C +90°C      |
| Ambient temperature / Temperatura ambiente       | -20°C +50°C      |
| Max operating pressure / Pressione di lavoro max | 300 bar          |
| Max flow / Portata massima                       | 20 l/min         |
| Standard seals / Guarnizioni standard            | NBR 70 Shore A   |
| External surfaces / Superfici esterne            | Zinc plated      |
| Cavity code / Codice cavità                      | DO-590.001.51.2S |

#### PERFORMANCE / PRESTAZIONI

Oil viscosity 24 mm<sup>2</sup>/s (3.5 °E) - Temperature 50°C

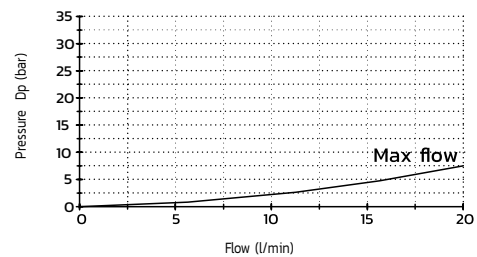

#### ORDERING CODE / CODICE ORDINAZIONE

21 C 04 C01 3 \* 51 0

| Seals Material |                        |
|----------------|------------------------|
| C01            | (Std) seals NBR 70     |
| C02            | Viton seals on request |

| Adjustment option |       |
|-------------------|-------|
| O                 | Knob  |
| M                 | Screw |