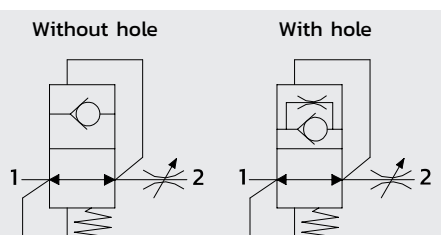

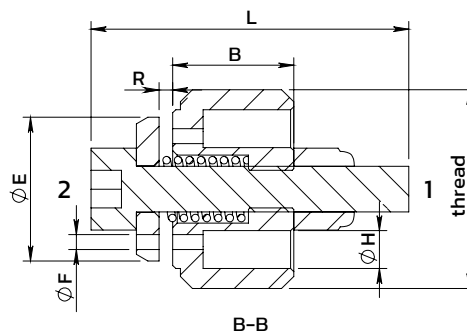




Hose break valves

Valvole di sicurezza (paracadute)


SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C

PERFORMANCE / PRESTAZIONI

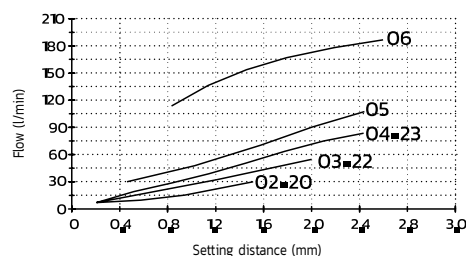Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

ORDERING CODE / CODICE ORDINAZIONE

18	A	**	00	6	1	**	00
----	---	----	----	---	---	----	----

Setting (example)	
15	R 1.5
20	R 2.0

Hole F Diameter (example)	
00	No hole.
10	F Ø 1.0

Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP
05	3/4 BSPP
06	1" BSPP
20	M 14X1.5
22	M 16X1.5
23	M 18X1.5

Standard code	Thread	B	ØD	ØE	ØH	L	R Std	Weight (kg)	Max. Flow (l/m)	Max. Pressure (bar)
18A0900610200	1/4	8	8	9.5	2.5	21	0.9	0.006	20	350
18A1500610300	3/8	10.5	10.5	12.5	3.5	21	1.5	0.012	50	350
18A2300610400	1/2	13	12.5	15	4.5	29	2.3	0.024	80	350
18A2500610500	3/4	18	16	18.5	6	34	2.5	0.048	140	350
18A2800610600	1"	20	19	25	7	40	2.8	0.098	180	350
18A0900612000	14X1.5	8	8	9.5	2.5	21	0.9	0.012	20	350
18A1800612200	16X1.5	10.5	10	12.5	3.5	21	1.8	0.013	50	350
18A2500612300	18X1.5	13	12	13.5	4.15	29	2.5	0.023	80	350

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.