
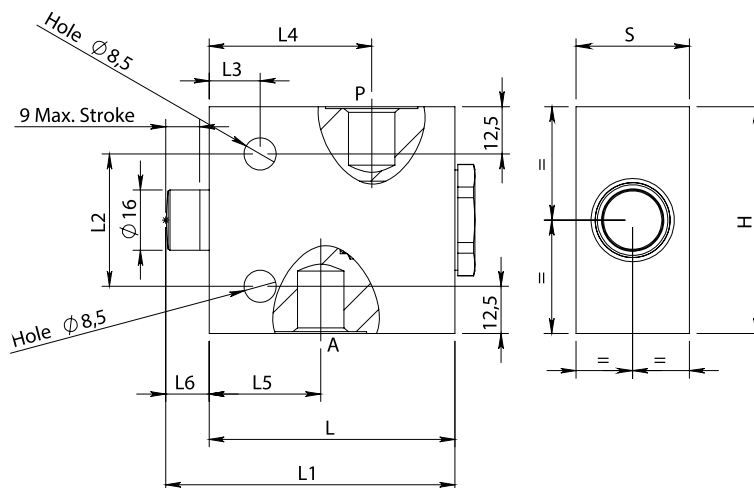



End-stroke valve double lock normally closed

Valvola di fine corsa doppia tenuta normalmente chiusa




SPECIFICATIONS / SPECIFICHE

Fluid viscosity / <i>Viscosità Fluida</i>	ISO 3448
Filtration / <i>Classe di contaminazione</i>	ISO 4406
Fluid temperature / <i>Temperatura fluido</i>	-20°C +90°C
Ambient temperature / <i>Temperatura ambiente</i>	-20°C +50°C
Standard seals / <i>Guarnizioni standard</i>	NBR 70 Shore A
External surfaces / <i>Superfici esterne</i>	Zinc plated steel

PERFORMANCE (FULLY OPEN)

Oil viscosity 24 mm²/s (3,5 °E) - Temperature 50°C

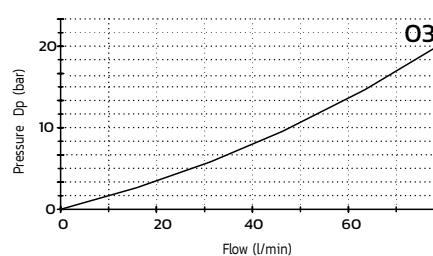

ORDERING CODE / CODICE ORDINAZIONE

20	L	01	C01	3	C	03	0
----	---	----	-----	---	---	----	---

Standard code	A-P ports	L	L1	L2	L3	L4	L5	L6	H	S	Weight (kg)	Max. Pressure (bar)	Max Flow (l/m)
20L02C013C030	3/8	65	76,5	35	13,5	43	29,5	11	60	30	0,83	350	40

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.