
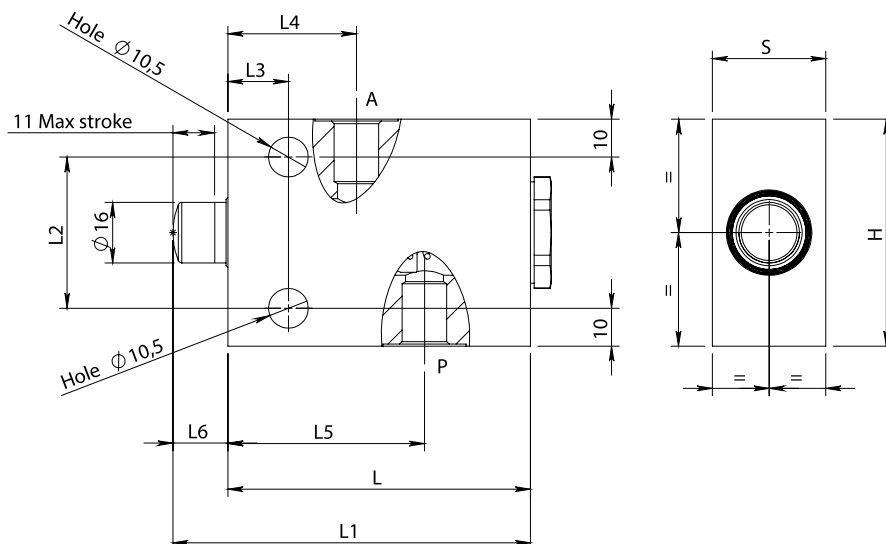
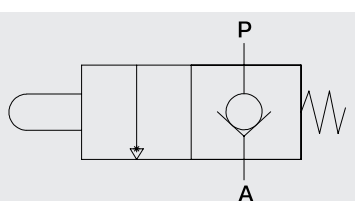


End-stroke valve normally closed

Valvola di fine corsa normalmente chiusa




SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
Standard seals / Guarnizioni standard	NBR 70 Shore A
External surfaces / Superfici esterne	Zinc plated steel

PERFORMANCE / PRESTAZIONI

Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

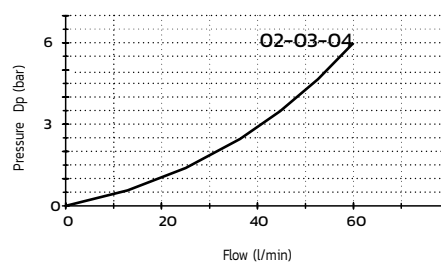

ORDERING CODE / CODICE ORDINAZIONE

20	L	06	C01	3	C	**	O
----	---	----	-----	---	---	----	---

Ports size

02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP

Standard code	A-P ports	L	L1	L2	L3	L4	L5	L6	H	S	Weight (kg)	Max. Pressure (bar)	Max Flow (l/m)
20L06C013C020	1/4	80	94,5	40	16	34	52	14,5	60	30	1,25	350	40
20L06C013C030	3/8	80	94,5	40	16	34	52	14,5	60	30	1,00	350	60
20L06C013C040	1/2	80	94,5	40	16	34	52	14,5	60	30	0,98	350	60