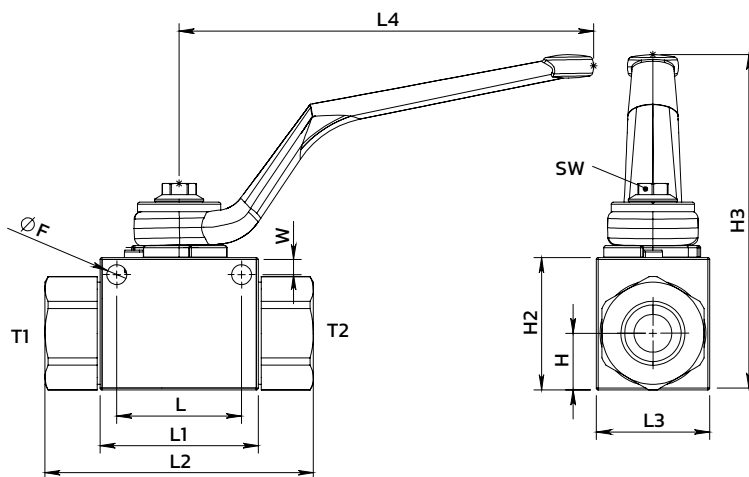

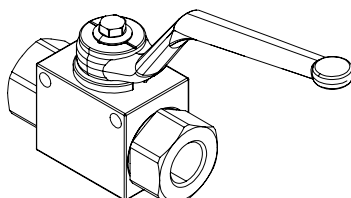


2-Way BSPP ball valve

Rubinetto a sfera 2 vie BSPP

SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
Standard seals / Guarnizioni standard	NBR
Manifold material / Materiale collettore	Zinc plated steel

ORDERING CODE / CODICE ORDINAZIONE

27	2	AY	000	**	3	P	**	N
----	---	----	-----	----	---	---	----	---

See table

Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP
05	3/4 BSPP
06	1" BSPP
07	1" 1/4 BSPP
08	1" 1/2 BSPP

Standard code	Thread (T1-T2-T3)	DN	L	L1	L2	L3	L4	H	H1	H2	H3	ØFH	W	SW	Weight (kg)	Max. Pressure (bar)
272AY000063P02N	1/4	6	34	39.4	69	26	110	14.3	33	47.3	87	5.1	4	9	0.4	500
272AY000103P03N	3/8	10	34	41.8	71	30	110	15	35	49.3	89	5.1	4	9	0.5	500
272AY000133P04N	1/2	13	36	44.4	83	35	110	18.3	40	54.3	94	5.1	4	9	0.6	500
272AY000203P05N	3/4	20	50	62.5	95	49	180	25.4	57	75.5	105	6.3	6	14	1.4	420
272AY000253P06N	1"	25	50	66.5	112	55	180	29.5	65	83.5	113	6.3	6	14	2.2	420
272AY000253P07N	1" 1/4	25	50	66.5	120	55	180	29.5	65	83.5	113	6.3	6	14	2.3	420
272AY000253P08N	1" 1/2	25	50	66.5	124	55	180	29.5	65	83.5	113	6.3	6	14	2.4	420

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.