
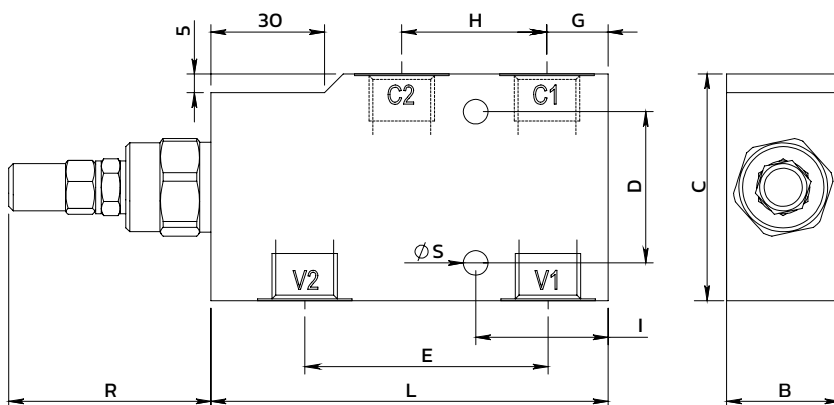



Single effect overcenter valve aluminium


Valvola overcenter semplice effetto alluminio



SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
Max operating pressure / Pressione di lavoro max	250 bar
Standard seals / Guarnizioni standard	NBR 70 Shore A
Manifold material / Materiale collettore	Aluminium

PERFORMANCE V2 to C2 / PRESTAZIONI

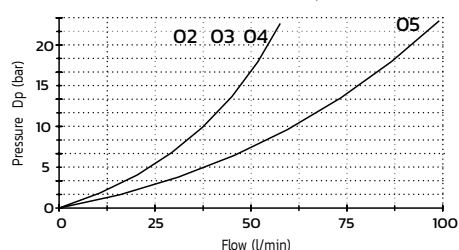Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

ORDERING CODE / CODICE ORDINAZIONE

15 A 00 B01 * M ** *

Pilot ratio	
A	(Std) see tab
B	8:1
C	11:1

Manifold material	
1	Raw Aluminium
2	Anodized aluminium

Adjustment option	
M	Steel cap (Std)
N	Tamper proof cap

Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP

Setting range (bar)	Std setting (bar)	P increase bar/turn
X 30-210	200	50
Y 60-350	300	80

Standard code	Thread V-C	B	C	D	E	G	H	L	I	R	ØS	Weight Alloy (kg)	Weight Steel (kg)	Max Flow (l/m)	Pilot ratio
15A00B011M02Y	1/4	30	60	40	64	16	38	105	35	54	6.5	0.7	1.4	30	4.25 :1
15A00B011M03Y	3/8	30	60	40	64	16	38	105	35	54	6.5	0.7	1.4	40	4.25 :1
15A00B011M04Y	1/2	30	60	50	64	16	38	105	35	54	6.5	0.8	1.9	60	4.25 :1

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.