



LHV-2-OMS**16****0.100**

Double effect overcenter valve, OMS flangeable






Valvola overcenter doppio effetto, flangiabile OMS



1=With brake release



0=without brake release

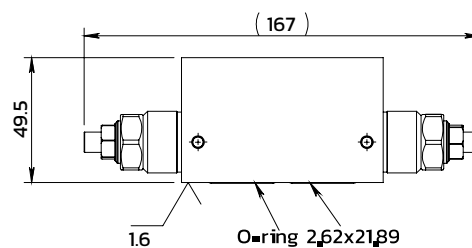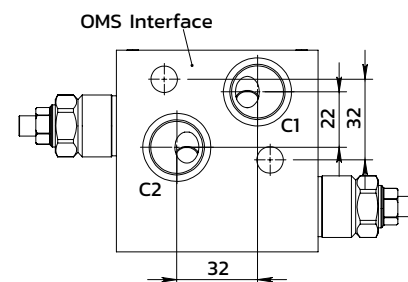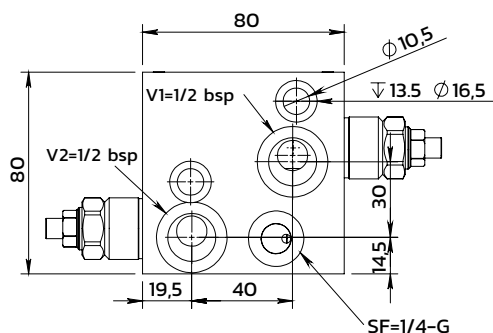


SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
Max operating pressure / Pressione di lavoro max	350 bar
Max flow / Portata massima	60 l/min
Standard seals / Guarnizioni standard	NBR 70 Shore A
Manifold material / Materiale collettore	Zinc plated steel

PERFORMANCE V to C / PRESTAZIONI

Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

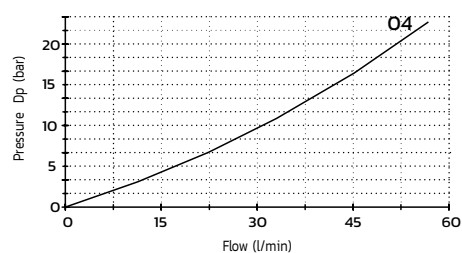

ORDERING CODE / CODICE ORDINAZIONE

16M A 12 K*8 3 M 04 *

Pilot ratio	
A	(Std) 4.25:1
B	8:1
C	11:1

Manifold model	
0	Without brake release
1	With brake release

Adjustment option	
M	Socket screw (Std)
N	Tamper proof cap

Setting range (bar)	Std setting (bar)	P increase bar/turn
X 30-210	200	50
Y 60-350	300	80

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.