
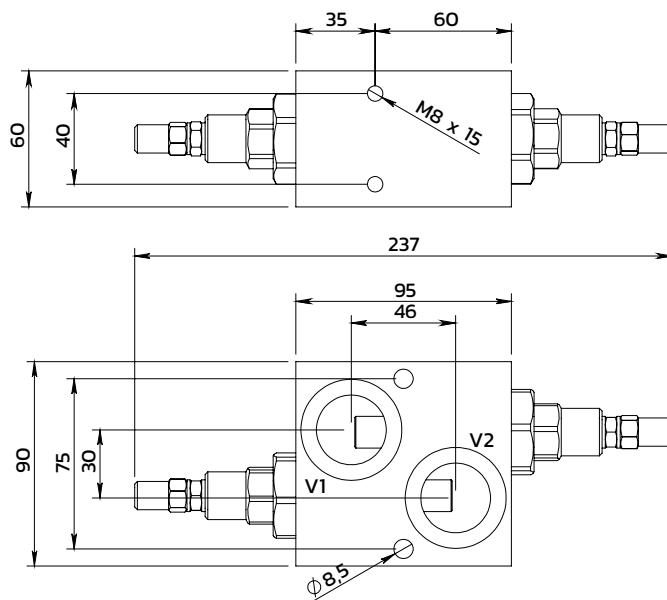



Dual cross over direct acting relief valve 1" ports

Valvola antiurto attacchi 1"




SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
Max operating pressure / Pressione di lavoro max	350 bar
Standard seals / Guarnizioni standard	NBR 70 Shore A
Manifold material / Materiale collettore	Zinc plated steel
Max flow / Portata massima	160 l/min

PERFORMANCE / PRESTAZIONI

Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

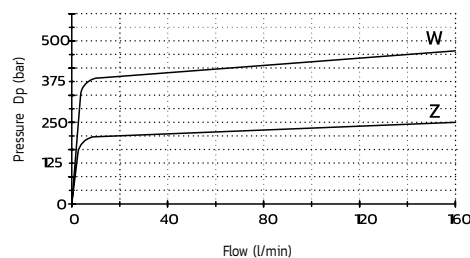

ORDERING CODE / CODICE ORDINAZIONE

10	M	02	A18	3	R	06	*
----	---	----	-----	---	---	----	---

Adjustment	
R	Screw with steel cap (Std)
M	Socket screw
N	Tamper resistant cap
O	Handknob and locknut

Ports size	
06	1" BSPP

Setting range (bar)		Std setting at 5 l/min (bar)
Z	20-200	160
W	50-400 (Std)	180