
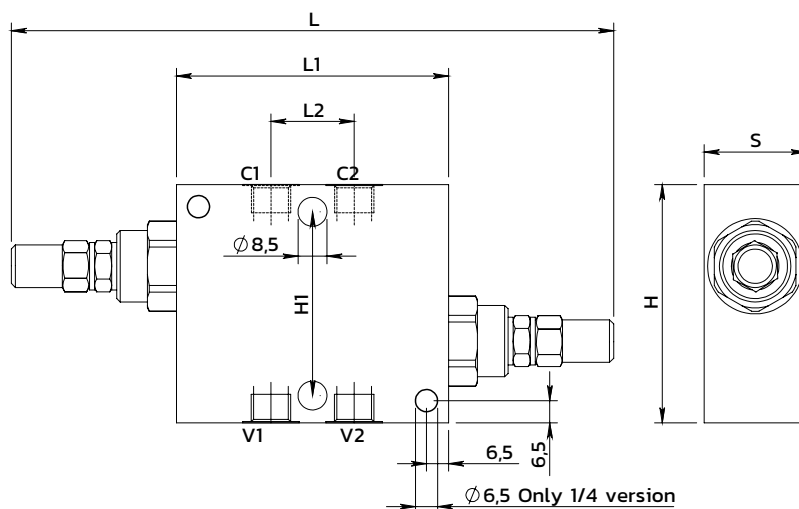

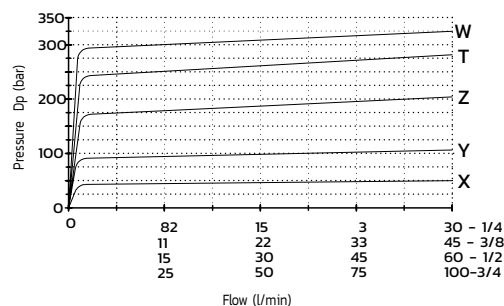


RVD-DI-180°**10****0.150**

Dual cross over direct acting relief valve

Valvola antiurto**SPECIFICATIONS / SPECIFICHE**

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
Max operating pressure / Pressione di lavoro max	350 bar
Standard seals / Guarnizioni standard	NBR 70 Shore A
Manifold material / Materiale collettore	Zinc plated steel

PERFORMANCE / PRESTAZIONIOil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C**ORDERING CODE / CODICE ORDINAZIONE**

10	M	02	A18	3	R	**	*
-----------	----------	-----------	------------	----------	----------	-----------	----------

Adjustment	
R	Screw with steel cap (Std)
N	Tamper resistant cap
O	Handknob and locknut

Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP
05	3/4 BSPP

Setting range (bar)	Std setting at 5 l/min (bar)
X 10-50	30
Y 20-100	70
Z 10-180 (Std)	90
T 50-250	130
W 80-300	150

Standard code	Thread (C1-C2) (V1-V2)	L	L1	L2	H	H1	S	Weight kg	Max Flow (l/m)
10M02A183R02Z	1/4	156	60	26	70	54	30	0.99	30
10M02A183R03Z	3/8	176	80	33	70	54	30	1.2	45
10M02A183R04Z	1/2	200	80	38	70	54	30	1.1	70
10M02A183R05Z	3/4	192	95	44	80	54	35	1.7	110

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.